


# OKS 422

## Universal Grease for Long-Life Lubrication

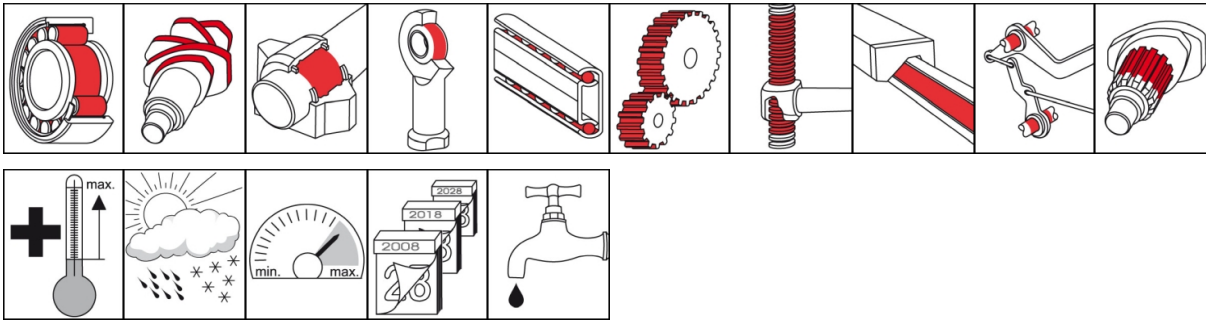

### Description

Fully synthetic high-performance grease for long-term lubrication of machine elements at high temperatures, speeds and loads.

### Applications

- Lubrication of roller and plain bearings as well as of threaded spindles, gearwheels, worms and similar components
- Lubrication of spindle bearings in machine tools

### Branches

- Rubber and plastic processing
- Shipbuilding and marine technology
- Logistics
- Chemical industry
- Glass and foundry industry
- Paper and packaging industry
- Rail vehicle technology
- Plant and machine (tool) engineering
- Municipal services
- Iron and steel industry

### Advantages and benefits

- Allows high machine service lives due to low-wear operation and low lubrication frequencies
- Outstanding resistance in a wide temperature range, at high stresses and surface slide speeds as well as at vibrations
- Resistant to cold and hot water
- Excellent wear protection

### Application tips

For highest effectiveness carefully clean the lubrication point, for example with OKS 2610/OKS 2611 universal cleaner. Before filling a bearing for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing, high-speed bearings (DN value above 400,000) up to about 1/4. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. In as far as available, the bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Caution: Only mix with suitable lubricants.

### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

# OKS 422

## Universal Grease for Long-Life Lubrication

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
thickener				barium-complex soap
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		KPHC2N-40
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	50
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	8
pour point	DIN ISO 3016	3°C step	°C	> -65
flashing point	DIN ISO 2592	> 79	°C	268
drop point	DIN ISO 2176		°C	230
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
flow pressure	DIN 51 805	-35°C	mbar	< 550
oil separation	DIN 51 817	18h/40°C	percent in weight	< 0.7
lower operating temperature	DIN 51 805	≤ 1,400 hPa	°C	-40
upper operating temperature	DIN 51 821-2	F50 (A/1500/6000), 100h	°C	140
maximal operating temperature			°C	200
colour				light-coloured
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.95
water resistance	DIN 51 807-1	3h/90°C	Degree	0-90
DN value (dm x n)			mm/min	800,000
four-ball test rig welding load	DIN 51 350-4		N	3,400
four-ball test rig wear	DIN 51 350-5		mm	0.6
SKF-EMCOR	DIN 51 802		corr. degree	≤ 1
<b>Product specific technical data</b>				
apparent dynamic viscosity	DIN 51 810	D 300s-1, ni and ne	mPa s	5,000
<b>Properties and approvals</b>				
UFI				8GA9-1043-N00K-M3N2

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47

82216 Maisach

+49 8142 3051 - 500

info@oks-germany.com

www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.