




Product specifications

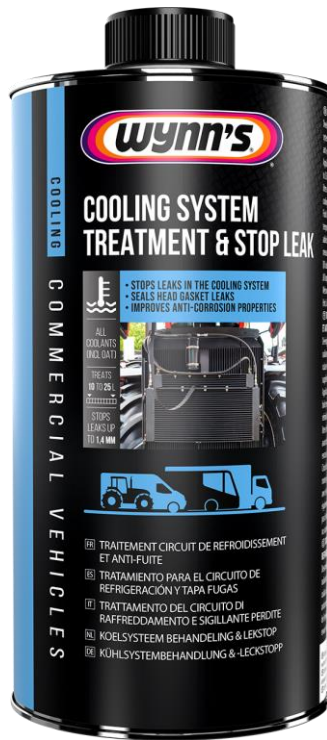

Cooling System Treatment & Stop Leak

High Performance in All Coolants



Wynn's Cooling System Treatment & Stop Leak is a developed to stop small leaks in the radiator, cooling system and head gasket whilst adding further anti-corrosive properties to the coolant.

Properties

- ✓ Stops and prevents leakages in the cooling system
- ✓ Stops head gasket leaks and water pump gasket leakage
- ✓ Is formulated not to block cooling system radiator channels and temperature sensors
- ✓ Enhanced protection against rust and corrosion
- ✓ Will not harm rubber hoses, gaskets, or other system components

Applications

- ✓ For all "water" cooled systems of all engines
- ✓ Can also be used as preventive agent
- ✓ Is compatible with all antifreezes and coolants, including OAT coolants
- ✓ Shake tin well and add to cooling system

ITW Additives Intl BV – Industriepark West 46 – B-9100 Sint-Niklaas / Belgium
 Tel: 32-3-766.60.20 - Fax: 32-3.778.16.56 – E-mail: mail@wynns.eu – Website: www.wynns.com

The data concerning properties and applications of the indicated products are offered in good faith and are based on our research and practical experiences. Due to the versatility of the application possibilities, it is impossible to mention all details and we do not assume any obligations or responsibilities resulting from this. When a new edition appears due to the technical development, the preceding data are no longer valid.



Product specifications

Directions

- ✓ If the cooling system is excessively fouled, it is recommended to first clean the system with Wynn's Cooling System Flush (W45990)
- ✓ 1 litre treats cooling systems up to 25 litres
- ✓ Add 1 litre to a minimum of 10 litres of coolant
- ✓ Start the engine & bring up to operating temperature with all heater controls in the HOT position
- ✓ Let the engine run for approximately 5 to 10 minutes until the leak(s) are sealed
- ✓ If necessary, top up with cooling liquid

Packaging

W45690 – 12x1 L – EN-FR-DE-NL-ES-IT

Note

- ✓ **ASTM D1881 Test:** Standard Test Method for Foaming Tendencies of Engine Coolant

ITW Additives Intl BV – Industriepark West 46 – B-9100 Sint-Niklaas / Belgium
 Tel: 32-3-766.60.20 - Fax: 32-3.778.16.56 – E-mail: mail@wynns.eu – Website: www.wynns.com

The data concerning properties and applications of the indicated products are offered in good faith and are based on our research and practical experiences. Due to the versatility of the application possibilities, it is impossible to mention all details and we do not assume any obligations or responsibilities resulting from this. When a new edition appears due to the technical development, the preceding data are no longer valid.